


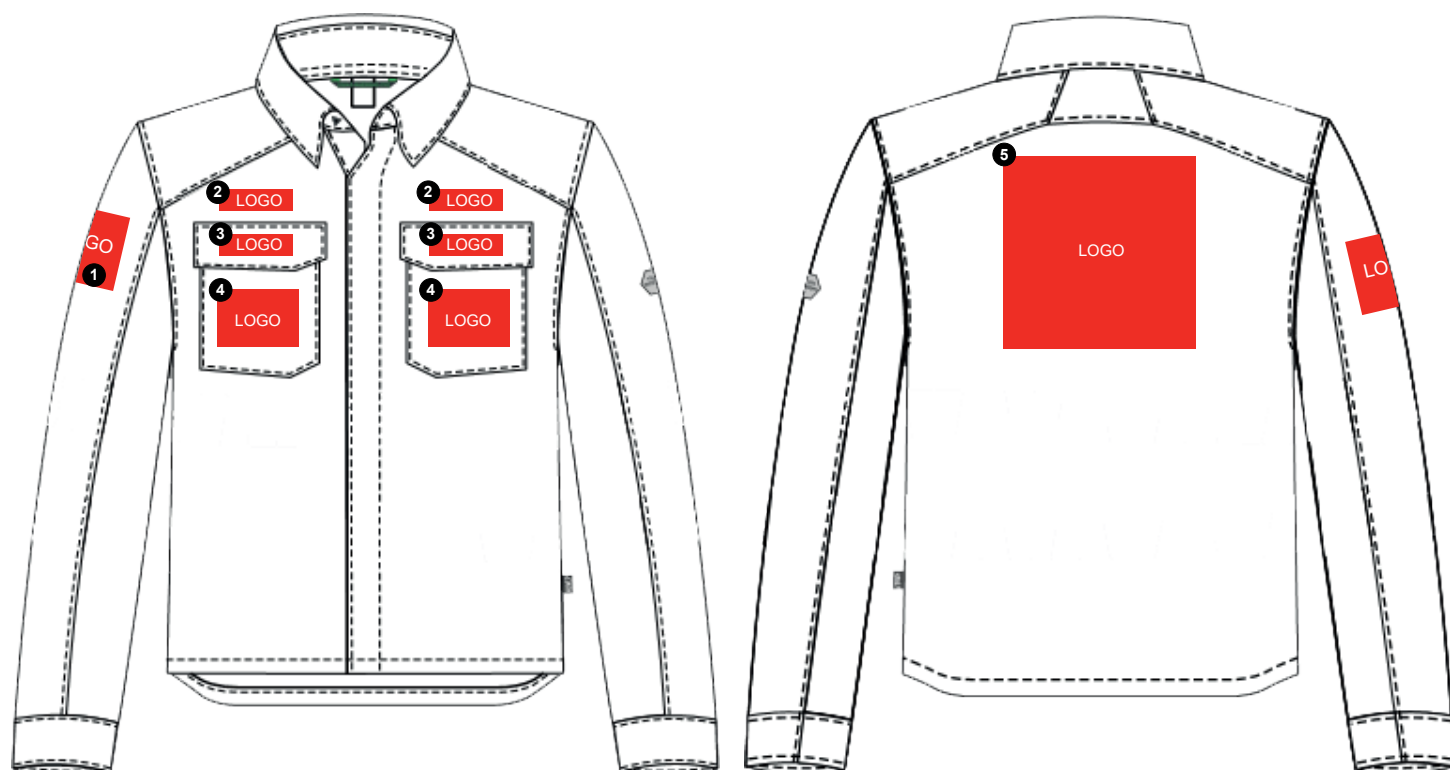

Model: 11002

size XS >

- ❶ Right sleeve available size:
10cm height x 10cm width.
- ❷ Above chest pocket available size:
3 cm height x 7cm width
- ❸ Flap chest pocket available size:
2,5cm height x 10cm width
- ❹ Chest pocket available size:
8cm height x 9cm width
- ❺ Back available size:
25cm height x 25cm width

Special attention for the following:

- * Seal never on stitches, snap fasteners or buttons.
- * If a garment complies with classes D and E within EN ISO 11612, a completely uncovered patch logo/embroidered badge is not allowed, because the raised edge could form a retention zone. Therefore, the placement of a certain patch logo/embroidery badge is only allowed, if the entire top edge of the logo is covered by a (pocket) flap, creating a roof tile-style overlapping construction. To certify a garment to the ISO 11612 standard with D or E, the garment should not have a retention zone, as these folds on the outside of the garment can serve as containment zones for hot or molten materials.
- * Patch logo's, badge etc. which are applied on the outermost surface of the garment, shall meet the flame-retardant requirements (EN ISO 11612 class A1).
- * Embroideries of aramide yarns can be applied on a pocket or a badge, but not on single layer fabric or through all layers (due to EN 13034), but only if the garment not complies with classes D and E as mentioned above.
- * According to EN 1149-5, it is not permitted to place removable badges on antistatic clothing. Only elements permanently attached to the clothing are permitted.