
LOGO INSTRUCTION
5 SAFETY IMAGE+ FLEX

Date: 06-03-2026

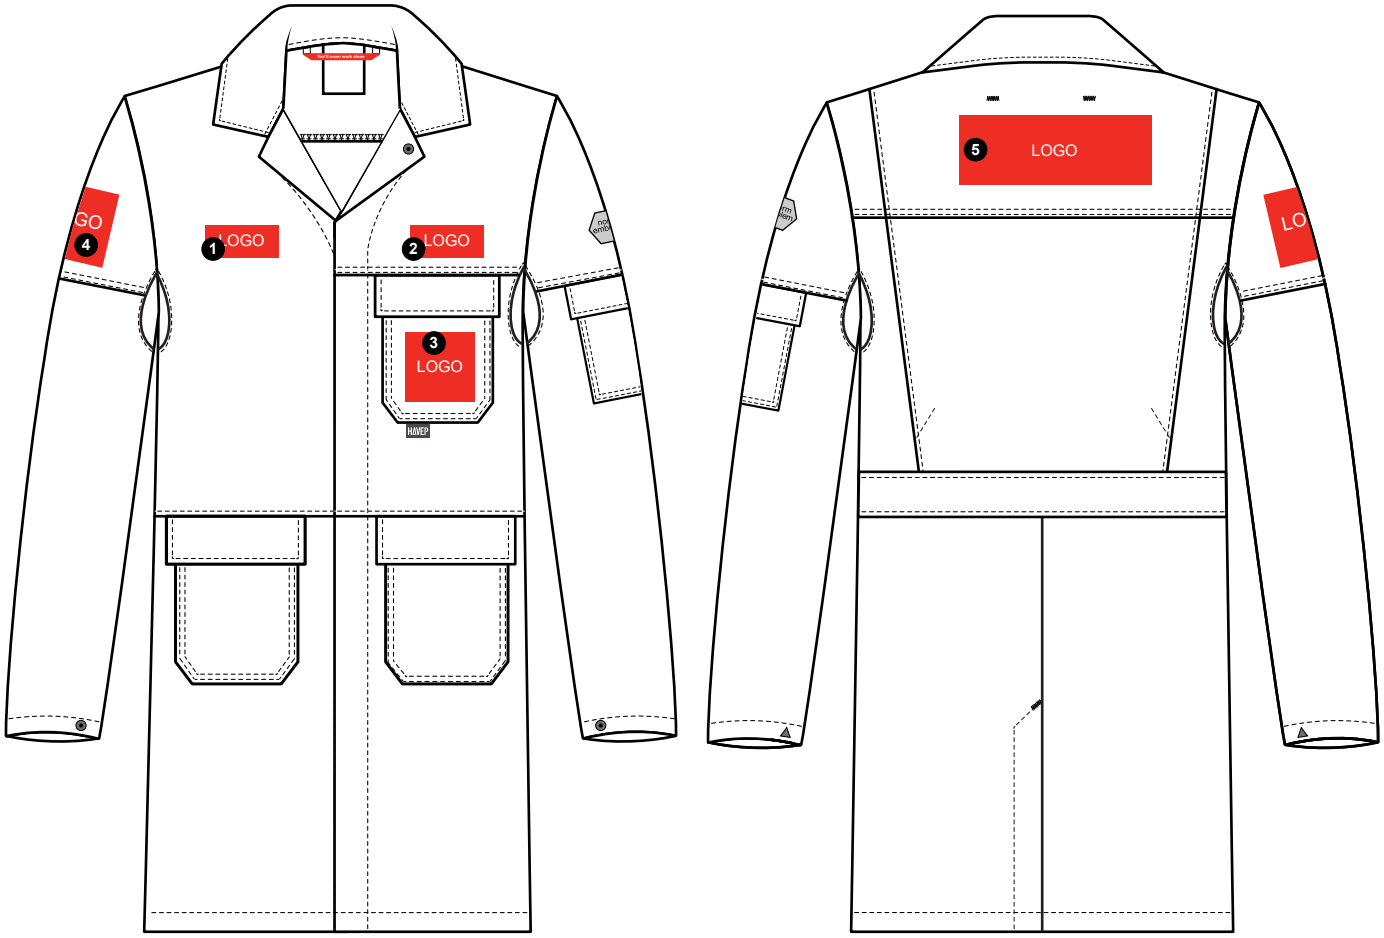

Model: 40262

size xxs>

1. Right chest available size:
   5cm height x 10cm width.
2. Above left chest pocket available size:
   5cm height x 10cm width
3. Left chest pocket available size:
   10cm height x 10cm width
4. Right sleeve available size:
   15cm height x 15cm width
5. Back available size:
   10cm height x 30cm width

Special attention for the following:

* Seal never on stitches, snap fasteners or buttons.
* If a garment complies with classes D and E within EN ISO 11612, a completely uncovered patch logo/embroidered badge is not allowed, because the raised edge could form a retention zone. Therefore, the placement of a certain patch logo/ embroidery badge is only allowed, if the entire top edge of the logo is covered by a (pocket) flap, creating a roof tile-style overlapping construction.To certify a garment to the ISO 11612 standard with D or E, the garment should not have a retention zone, as these folds on the outside of the garment can serve as containment zones for hot or molten materials.
* Patch logo's, badge etc. which are applied on the outermost surface of the garment, shell meet the flame-retardant requirements (EN ISO 11612 class A1).
* Embroideries of aramide yarns can be applied on a pocket or a badge, but not on single layer fabric or through all layers (due to EN 13034),but only if the garment not complies with classes D and E as mentioned above.
* According to EN 1149-5, it is not permitted to place removable badges on antistatic clothing. Only elements permanently attached to the clothing are permitted.