

## LOGO INSTRUCTION 5 SAFETY IMAGE+

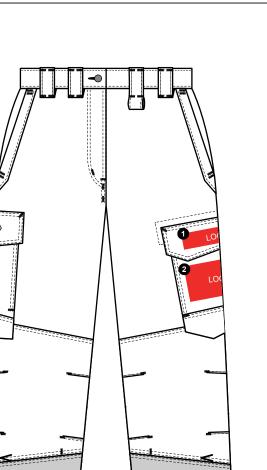

\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*

\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*

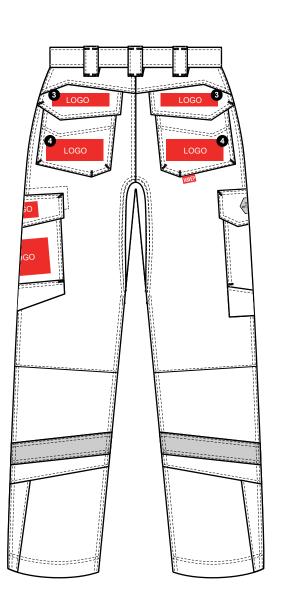

Model: 80517 size 38 >	
<ol> <li>Flap thigh bone pocket available size: cm height x cm width.</li> <li>Thigh bone pocket available size: cm height x cm width</li> <li>Flap back pocket available size: cm height x cm width</li> <li>Back pocket available size: cm height x cm width</li> </ol>	<ul> <li>Special attention for the following:</li> <li>* Seal never on stitches, snap fasteners or buttons.</li> <li>* If a garment complies with classes D and E within EN ISO 11612, a patch logo/embroidered badge is not allowed, as it may cause a retention zone. To certify a garment to the ISO 11612 standard with D or E, the garment should not have a retention zone, as these folds on the outside of the garment can serve as containment zones for hot or molten materials.</li> <li>* Patch logo's, badge etc. which are applied on the outermost surface of the garment, shell meet the flame-retardant requirements (EN ISO 11612 class A1).</li> <li>* Embroideries of aramide yarns can be applied on a pocket or a badge, but not on single layer fabric or through all layers (due to EN 13034),but only if the garment not complies with classes D and E as mentioned above.</li> <li>* According to EN 1149-5, it is not permitted to place removable badges on antistatic clothing. Only elements permanently attached to the clothing are permitted.</li> </ul>